High performing column level indicators

Set screw
and oil circulation.



Tube in Pyrex
(ESG safety glass) resistant to
glycol-based solutions.

Maximum continuous working
temperature 130 °C
with peaks at 160 °C
and pressure of 5/6 bar.

Contrast screen
with level indications.

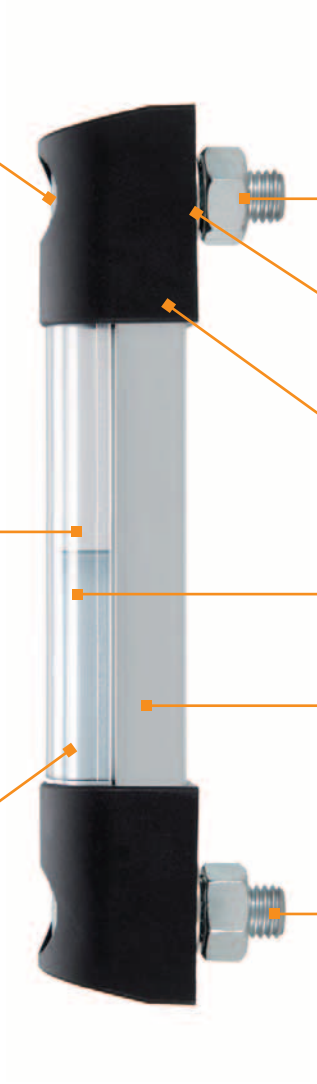

Zinc-plated or stainless steel
screws and nuts.

FKM type VITON®*
synthetic rubber
or NBR rubber O-Ring.

**Registered trademark by DuPont Dow Elastomers.*

Technopolymer
assembly ends.

Polycarbonate protection
(against accidental shocks).

Aluminium support
with side visibility.

Hole centre distance for
fixing up to 1500 mm.

Elesa design alla rättigheter förbehållna i enlighet med lagen. Ange alltid källan vid reproduktion av våra ritningar.