

MATERIAL

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

STANDARD EXECUTIONS


- **BAS2-A**: zinc-plated steel M10 screws, nuts and washers.
- **BAS2-SST**: AISI 304 stainless steel M10 screws, nuts and washers.

ASSEMBLY ON LEVELLING ELEMENTS


The bipod support bases are supplied with brass bosses, threaded pass-through hole for the assembly of the levelling element series LS.A (see page 798), LV.A (see page 804), LV.F (see page 818).

FEATURES

The rounded shapes with a modern and elegant aesthetic guarantee maximum cleanability in the event of liquids or dust falling from above. Maximum tightening torque for screw assembly 35 Nm.




Retention force
 $P = 2000 \text{ N}$



Max. static load
 $P = 9800 \text{ N}$

Values obtained with tightening torque 35 Nm

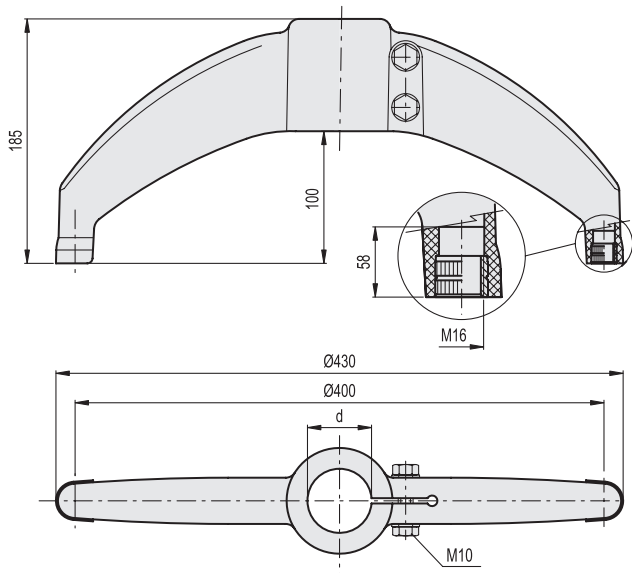

BAS2

Code	Description	d Tube (mm)	d Tube (GAS)	ΔΔ
419636	BAS2-42-A	42.4	1"1/4	680
419634	BAS2-48-A	48.3	1"1/2	670
419632	BAS2-60-A	60.3	2"	650

BAS2-SST

Code	Description	ΔΔ
419637	BAS2-42-SST	680
419635	BAS2-48-SST	670
419633	BAS2-60-SST	650