

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19

MATERIAL

Aluminium.

CONTRAST SCREEN

Matte anodised aluminium marked "MAGNETIC" and graphic symbol.

PACKING RING

NBR synthetic rubber.

PERMANENT MAGNETIC ELEMENT


Special alloy with a high attractive power, to keep metal particles in oil.

MAXIMUM CONTINUOUS WORKING TEMPERATURE

100°C.

TECHNICAL DATA

The tightening torque indicated in the table guarantees an optimal tightness, keeping the packing ring in the correct position.

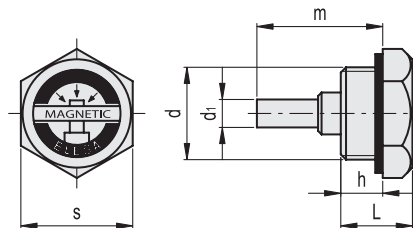

Code	Description	s	d	h	L	d1	m	Tightening torque [Nm]	
59791	TMA.1/4	19	G 1/4	9	15.5	6	30	8+10	17
59801	TMA.3/8	22	G 3/8	9	15.5	8	31	8+10	25
59811	TMA.1/2	26	G 1/2	11	18	8	34	10+15	32
59821	TMA.3/4	32	G 3/4	12	20	8	35.5	10+15	47