





MATERIAL
Steel.

FEATURES
The shims are used to correct any misalignments and facilitate the correct positioning of the jaw blocks MM-SC (see page -), thus maximising the clamping force.
For each code a kit of 5 shims of different "s" sizes is supplied.

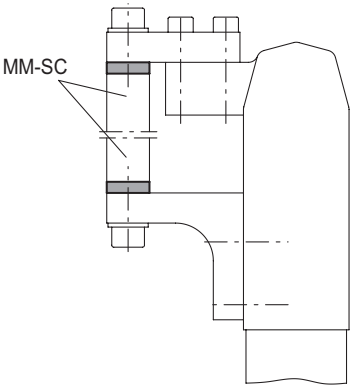

Conversion Table			
1 mm = 0.039 inch			
l2		l3	
mm	inch	mm	inch
13	0.51	17	0.67
17	0.67	23	0.91
20	0.79	30	1.18
		40	1.57

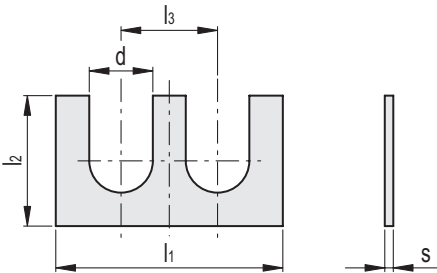

Code	Description	d	l1	l2	l3	s	
MM.20020	MM-GBK-20	9.2	30	13	17	0.1 - 0.2 - 0.3 - 0.5 - 1	1
MM.20032	MM-GBK-32	11.2	40	17	23	0.1 - 0.2 - 0.3 - 0.5 - 1	1
MM.20040	MM-GBK-40	13.2	50	20	30	0.1 - 0.2 - 0.3 - 0.5 - 1	2
MM.20050	MM-GBK-50	13.2	60	20	40	0.1 - 0.2 - 0.3 - 0.5 - 1	4