Adjustable feet

Technopolymer base, stainless steel stem

INOX STAINLESS STEEL · RoHS · PA · NBR · +100° -30°

BASE

Glass-fibre reinforced polyamide based (PA) technopolymer, black colour, matte finish.

ARTICULATED STEM

Threaded AISI 304 stainless steel with adjusting square.

STANDARD EXECUTIONS

- **LSQ.A-SST**: without no-slip disk.
- **LSQ.A-AS-SST**: with NBR rubber no-slip disk, hardness 70 Shore A, supplied assembled to the base.

FEATURES

The particular assembling system of the no-slip disk to the base assures a perfect anchoring, preventing separation even in case of impact during transport or of adhesion (sticking) to the floor (see No-slip disks on page 835).

ORDER INFORMATION

The levelling feet are supplied unassembled to make carriage and storage easier. The components (base and stem) are supplied in separate packing: less volume taken and better protection from scratches and dirt.

To order bases and stems separately, see:


- table of possible combinations Bases/Stems (see page 839)
- the codes of the Bases (see page 836)
- the codes of the Stems (see page 840).

ACCESSORIES ON REQUEST

AISI 304 stainless steel nut (see Nuts NT. pag. 835).



ELESA Original design

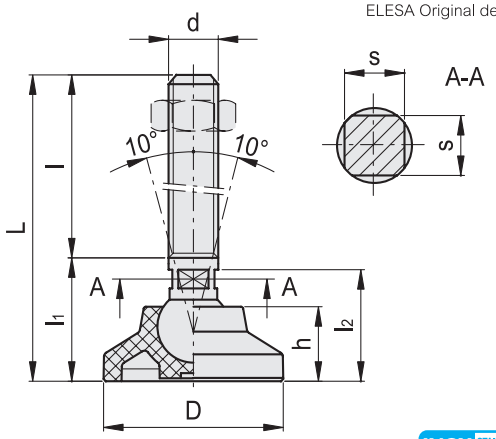

LSQ.A-SST


INOX STAINLESS STEEL

Code	Description	D	d	L	l	l1	l2	h	s	Articulation Ø	Max. limit static load* [N]	⚖
359991	LSQ.A-25-8.5-SST-M8x48	25	M8	68	48	20	18.5	12	7	8.5	5000	24
359993	LSQ.A-25-8.5-SST-M8x73	25	M8	93	73	20	18.5	12	7	8.5	5000	34
360001	LSQ.A-25-8.5-SST-M10x48	25	M10	68	48	20	18.5	12	7	8.5	5000	31
360003	LSQ.A-25-8.5-SST-M10x73	25	M10	93	73	20	18.5	12	7	8.5	5000	47
360005	LSQ.A-25-8.5-SST-M10x103	25	M10	123	103	20	18.5	12	7	8.5	5000	65
360011	LSQ.A-25-8.5-SST-M12x48	25	M12	68	48	20	18.5	12	9	8.5	5000	42
360013	LSQ.A-25-8.5-SST-M12x73	25	M12	93	73	20	18.5	12	9	8.5	5000	64
360015	LSQ.A-25-8.5-SST-M12x103	25	M12	123	103	20	18.5	12	9	8.5	5000	95
360031	LSQ.A-25-14-SST-M16x68	25	M16	92	68	24	22.5	12	12	14	5000	100
360033	LSQ.A-25-14-SST-M16x108	25	M16	132	108	24	22.5	12	12	14	5000	164
360035	LSQ.A-25-14-SST-M16x148	25	M16	172	148	24	22.5	12	12	14	5000	228
360037	LSQ.A-25-14-SST-M16x168	25	M16	192	168	24	22.5	12	12	14	5000	260
360091	LSQ.A-32-8.5-SST-M8x48	32	M8	71	48	23	21.5	15	7	8.5	6000	28
360093	LSQ.A-32-8.5-SST-M8x73	32	M8	96	73	23	21.5	15	7	8.5	6000	38
360101	LSQ.A-32-8.5-SST-M10x48	32	M10	71	48	23	21.5	15	7	8.5	6000	35
360103	LSQ.A-32-8.5-SST-M10x73	32	M10	96	73	23	21.5	15	7	8.5	6000	51
360105	LSQ.A-32-8.5-SST-M10x103	32	M10	126	103	23	21.5	15	7	8.5	6000	69
360111	LSQ.A-32-8.5-SST-M12x48	32	M12	71	48	23	21.5	15	9	8.5	6000	46
360113	LSQ.A-32-8.5-SST-M12x73	32	M12	96	73	23	21.5	15	9	8.5	6000	68
360115	LSQ.A-32-8.5-SST-M12x103	32	M12	126	103	23	21.5	15	9	8.5	6000	99
360131	LSQ.A-32-14-SST-M16x68	32	M16	92	68	24	22.5	15	12	14	7000	104
360133	LSQ.A-32-14-SST-M16x108	32	M16	132	108	24	22.5	15	12	14	7000	168
360135	LSQ.A-32-14-SST-M16x148	32	M16	172	148	24	22.5	15	12	14	7000	232
360137	LSQ.A-32-14-SST-M16x168	32	M16	192	168	24	22.5	15	12	14	7000	264

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

12/2022

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.

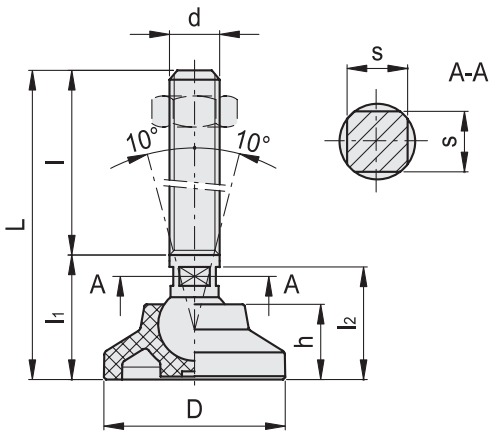


LSQ.A-SST

INOX STAINLESS STEEL

Code	Description	D	d	L	l	l1	l2	h	s	Articulation Ø	Max. limit static load* [N]	⚖
360191	LSQ.A-40-8.5-SST-M8x48	40	M8	73	48	25	23.5	17	7	8.5	7000	33
360193	LSQ.A-40-8.5-SST-M8x73	40	M8	98	73	25	23.5	17	7	8.5	7000	43
360201	LSQ.A-40-8.5-SST-M10x48	40	M10	73	48	25	23.5	17	7	8.5	7000	40
360203	LSQ.A-40-8.5-SST-M10x73	40	M10	98	73	25	23.5	17	7	8.5	7000	56
360205	LSQ.A-40-8.5-SST-M10x103	40	M10	128	103	25	23.5	17	7	8.5	7000	74
360211	LSQ.A-40-8.5-SST-M12x48	40	M12	73	48	25	23.5	17	9	8.5	7000	51
360213	LSQ.A-40-8.5-SST-M12x73	40	M12	98	73	25	23.5	17	9	8.5	7000	73
360215	LSQ.A-40-8.5-SST-M12x103	40	M12	128	103	25	23.5	17	9	8.5	7000	104
360231	LSQ.A-40-14-SST-M16x68	40	M16	93	68	25	23.5	17	12	14	10000	109
360233	LSQ.A-40-14-SST-M16x108	40	M16	133	108	25	23.5	17	12	14	10000	173
360235	LSQ.A-40-14-SST-M16x148	40	M16	173	148	25	23.5	17	12	14	10000	237
360237	LSQ.A-40-14-SST-M16x168	40	M16	193	168	25	23.5	17	12	14	10000	269
360291	LSQ.A-50-8.5-SST-M8x48	50	M8	75	48	27	25.5	19	7	8.5	7000	39
360293	LSQ.A-50-8.5-SST-M8x73	50	M8	100	73	27	25.5	19	7	8.5	7000	49
360301	LSQ.A-50-8.5-SST-M10x48	50	M10	75	48	27	25.5	19	7	8.5	7000	46
360303	LSQ.A-50-8.5-SST-M10x73	50	M10	100	73	27	25.5	19	7	8.5	7000	62
360305	LSQ.A-50-8.5-SST-M10x103	50	M10	130	103	27	25.5	19	7	8.5	7000	80
360311	LSQ.A-50-8.5-SST-M12x48	50	M12	75	48	27	25.5	19	9	8.5	7000	57
360313	LSQ.A-50-8.5-SST-M12x73	50	M12	100	73	27	25.5	19	9	8.5	7000	79
360315	LSQ.A-50-8.5-SST-M12x103	50	M12	130	103	27	25.5	19	9	8.5	7000	110
360331	LSQ.A-50-14-SST-M16x68	50	M16	95	68	27	25.5	19	12	14	10000	115
360333	LSQ.A-50-14-SST-M16x108	50	M16	135	108	27	25.5	19	12	14	10000	179
360335	LSQ.A-50-14-SST-M16x148	50	M16	175	148	27	25.5	19	12	14	10000	243
360337	LSQ.A-50-14-SST-M16x168	50	M16	195	168	27	25.5	19	12	14	10000	275
360391	LSQ.A-60-14-SST-M16X68	60	M16	104	68	36	34.5	24	12	14	14000	125
360393	LSQ.A-60-14-SST-M16X108	60	M16	144	108	36	34.5	24	12	14	14000	195
360401	LSQ.A-60-14-SST-M16X148	60	M16	184	148	36	34.5	24	12	14	14000	255
360403	LSQ.A-60-14-SST-M16X168	60	M16	204	158	36	34.5	24	12	14	14000	280
360405	LSQ.A-60-14-SST-M20X110	60	M20	151	110	41	38.5	24	15	14	14000	374
360411	LSQ.A-60-14-SST-M20X150	60	M20	191	150	41	38.5	24	15	14	14000	405
360413	LSQ.A-60-14-SST-M20X170	60	M20	211	170	41	38.5	24	15	14	14000	440
360415	LSQ.A-60-14-SST-M20X210	60	M20	251	210	41	38.5	24	15	14	14000	505

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.

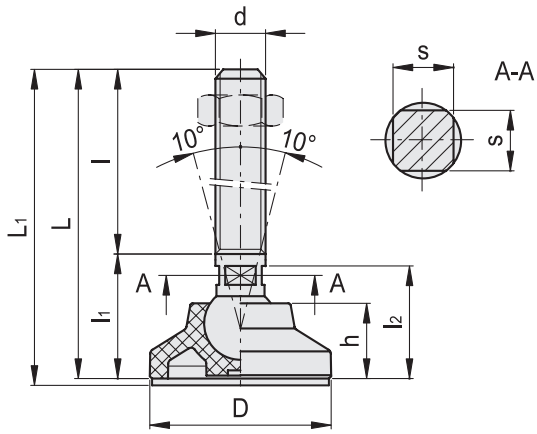

LSQ.A-AS-SST


INOX STAINLESS STEEL

Code	Description	D	d	L	L1	l	l1	l2	h	s	Articulation Ø	Max. limit static load* [N]	⚖
360491	LSQ.A-25-8.5-AS-SST-M8x48	25	M8	68	71	48	20	18.5	12	7	8.5	5000	26
360533	LSQ.A-25-14-AS-SST-M16x108	25	M16	132	135	108	24	22.5	12	12	14	5000	166
360493	LSQ.A-25-8.5-AS-SST-M8x73	25	M8	93	96	73	20	18.5	12	7	8.5	5000	36
360535	LSQ.A-25-14-AS-SST-M16x148	25	M16	172	175	148	24	22.5	12	12	14	5000	230
360501	LSQ.A-25-8.5-AS-SST-M10x48	25	M10	68	71	48	20	18.5	12	7	8.5	5000	33
360537	LSQ.A-25-14-AS-SST-M16x168	25	M16	192	195	168	24	22.5	12	12	14	5000	262
360503	LSQ.A-25-8.5-AS-SST-M10x73	25	M10	93	96	73	20	18.5	12	7	8.5	5000	49
360591	LSQ.A-32-8.5-AS-SST-M8x48	32	M8	71	74	48	23	21.5	15	7	8.5	6000	32
360505	LSQ.A-25-8.5-AS-SST-M10x103	25	M10	123	126	103	20	18.5	12	7	8.5	5000	67
360593	LSQ.A-32-8.5-AS-SST-M8x73	32	M8	96	99	73	23	21.5	15	7	8.5	6000	42
360511	LSQ.A-25-8.5-AS-SST-M12x48	25	M12	68	71	48	20	18.5	12	9	8.5	5000	44
360601	LSQ.A-32-8.5-AS-SST-M10x48	32	M10	71	74	48	23	21.5	15	7	8.5	6000	39
360513	LSQ.A-25-8.5-AS-SST-M12x73	25	M12	93	96	73	20	18.5	12	9	8.5	5000	66
360603	LSQ.A-32-8.5-AS-SST-M10x73	32	M10	96	99	73	23	21.5	15	7	8.5	6000	55
360515	LSQ.A-25-8.5-AS-SST-M12x103	25	M12	123	126	103	20	18.5	12	9	8.5	5000	97
360605	LSQ.A-32-8.5-AS-SST-M10x103	32	M10	126	129	103	23	21.5	15	7	8.5	6000	73
360531	LSQ.A-25-14-AS-SST-M16x68	25	M16	92	95	68	24	22.5	12	12	14	5000	102
360611	LSQ.A-32-8.5-AS-SST-M12x48	32	M12	71	74	48	23	21.5	15	9	8.5	6000	50
360613	LSQ.A-32-8.5-AS-SST-M12x73	32	M12	96	99	73	23	21.5	15	9	8.5	6000	72
360615	LSQ.A-32-8.5-AS-SST-M12x103	32	M12	126	129	103	23	21.5	15	9	8.5	6000	103
360631	LSQ.A-32-14-AS-SST-M16x68	32	M16	92	95	68	24	22.5	15	12	14	7000	108
360633	LSQ.A-32-14-AS-SST-M16x108	32	M16	132	135	108	24	22.5	15	12	14	7000	172
360635	LSQ.A-32-14-AS-SST-M16x148	32	M16	172	175	148	24	22.5	15	12	14	7000	236
360637	LSQ.A-32-14-AS-SST-M16x168	32	M16	192	195	168	24	22.5	15	12	14	7000	268
360691	LSQ.A-40-8.5-AS-SST-M8x48	40	M8	73	76	48	25	23.5	17	7	8.5	7000	40
360693	LSQ.A-40-8.5-AS-SST-M8x73	40	M8	98	101	73	25	23.5	17	7	8.5	7000	50
360701	LSQ.A-40-8.5-AS-SST-M10x48	40	M10	73	76	48	25	23.5	17	7	8.5	7000	47
360703	LSQ.A-40-8.5-AS-SST-M10x73	40	M10	98	101	73	25	23.5	17	7	8.5	7000	63
360705	LSQ.A-40-8.5-AS-SST-M10x103	40	M10	128	131	103	25	23.5	17	7	8.5	7000	81
360711	LSQ.A-40-8.5-AS-SST-M12x48	40	M12	73	76	48	25	23.5	17	9	8.5	7000	58
360713	LSQ.A-40-8.5-AS-SST-M12x73	40	M12	98	101	73	25	23.5	17	9	8.5	7000	80
360715	LSQ.A-40-8.5-AS-SST-M12x103	40	M12	128	131	103	25	23.5	17	9	8.5	7000	111
360731	LSQ.A-40-14-AS-SST-M16x68	40	M16	93	96	68	25	23.5	17	12	14	10000	116
360733	LSQ.A-40-14-AS-SST-M16x108	40	M16	133	136	108	25	23.5	17	12	14	10000	180
360735	LSQ.A-40-14-AS-SST-M16x148	40	M16	173	176	148	25	23.5	17	12	14	10000	244
360737	LSQ.A-40-14-AS-SST-M16x168	40	M16	193	196	168	25	23.5	17	12	14	10000	276

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

12/2022

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.

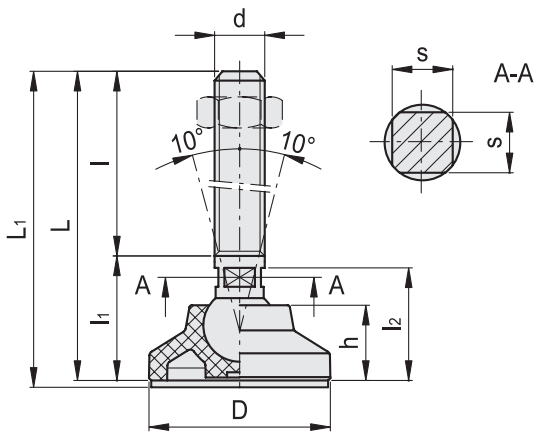

LSQ.A-AS-SST

INOX STAINLESS STEEL

Code	Description	D	d	L	L1	l	l1	l2	h	s	Articulation Ø	Max. limit static load* [N]	⚖
360793	LSQ.A-50-8.5-AS-SST-M8x73	50	M8	100	103	73	27	25.5	19	7	8.5	7000	61
360801	LSQ.A-50-8.5-AS-SST-M10x48	50	M10	75	78	48	27	25.5	19	7	8.5	7000	58
360803	LSQ.A-50-8.5-AS-SST-M10x73	50	M10	100	103	73	27	25.5	19	7	8.5	7000	74
360805	LSQ.A-50-8.5-AS-SST-M10x103	50	M10	130	133	103	27	25.5	19	7	8.5	7000	92
360811	LSQ.A-50-8.5-AS-SST-M12x48	50	M12	75	78	48	27	25.5	19	9	8.5	7000	69
360813	LSQ.A-50-8.5-AS-SST-M12x73	50	M12	100	103	73	27	25.5	19	9	8.5	7000	91
360815	LSQ.A-50-8.5-AS-SST-M12x103	50	M12	130	133	103	27	25.5	19	9	8.5	7000	122
360831	LSQ.A-50-14-AS-SST-M16x68	50	M16	95	98	68	27	25.5	19	12	14	10000	127
360833	LSQ.A-50-14-AS-SST-M16x108	50	M16	135	138	108	27	25.5	19	12	14	10000	191
360835	LSQ.A-50-14-AS-SST-M16x148	50	M16	175	178	148	27	25.5	19	12	14	10000	255
360837	LSQ.A-50-14-AS-SST-M16x168	50	M16	195	198	168	27	25.5	19	12	14	10000	287
360891	LSQ.A-60-14-AS-SST-M16X68	60	M16	104	107	68	36	34.5	24	12	14	14000	137
360893	LSQ.A-60-14-AS-SST-M16X108	60	M16	144	147	108	36	34.5	24	12	14	14000	207
360901	LSQ.A-60-14-AS-SST-M16X148	60	M16	184	187	148	36	34.5	24	12	14	14000	267
360903	LSQ.A-60-14-AS-SST-M16X168	60	M16	204	207	158	36	34.5	24	12	14	14000	292
360905	LSQ.A-60-14-AS-SST-M20X110	60	M20	151	154	110	41	38.5	24	15	14	14000	386
360911	LSQ.A-60-14-AS-SST-M20X150	60	M20	191	194	150	41	38.5	24	15	14	14000	417
360913	LSQ.A-60-14-AS-SST-M20X170	60	M20	211	214	170	41	38.5	24	15	14	14000	452
360915	LSQ.A-60-14-AS-SST-M20X210	60	M20	251	254	210	41	38.5	24	15	14	14000	517

* The max static load is the value above which the load applied to the element may cause some plastic material breakage, in particular conditions of use. Obviously, a factor that takes into consideration the importance and the safety level of the specific application must be applied to this value.

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.