RoHS PP +100° 0°

ENDS AND SENSOR HOLDER
Polypropylene based (PP) technopolymer, black colour, matte finish.

AXIS AND ROTOR PROPELLER
Polypropylene based (PP) technopolymer, red colour. AISI 304 stainless steel sensor activating clips.

TUBULAR WINDOW
Borosilicate glass, high-resistance, also suitable for use with glycol-based solutions.

SENSOR
Nickel-plated brass inductive sensor

TIE RODS
AISI 316L stainless steel.

PACKING RINGS
NBR synthetic rubber.

STANDARD EXECUTION
Brass bosses with cylindrical gas thread according to UNI ISO 228/1.

MAXIMUM CONTINUOUS WORKING TEMPERATURE
100° C.

Sensor	Inductive
Power supply	10 – 30 Vcc
Input	10 mA
Max load	200 mA
Short circuit protection	Yes
Reverse polarity protection	Yes
Output	PNP
Connector	M12x1 – 4 poli
Protection class	IP67


FEATURES AND APPLICATIONS
The indicator can be mounted in any position.
In case of mounting on rigid tubes, it is recommended to place the indicator perfectly aligned with the tubes.
The indicator operates with two-way liquid flows with a viscosity lower than 30cSt.
In order to allow the propeller rotation, a minimum flow rate is required depending on the type of fluid and its viscosity.
At the passage of the minimum flow rate, the rotor starts to rotate with a speed proportional to the fluid flow.
The inductive sensor, completely separated from the liquid passage area, reads the passage of the two metal clips mounted on the rotor, providing a frequency variation that can be transformed into a reading of the flow rate by connection to a PLC.

ASSEMBLY INSTRUCTIONS
To ensure the correct operation of the rotor, it is necessary to wash and purge the circuit before mounting the indicator, to eliminate any particles to work in clean fluid conditions.
Since the presence of air bubbles in the fluid can give rise to measurement errors, it is advisable to mount the indicator before valves and / or other components that could create cavitation.

MEASURING RANGE


- Bosses with NPT conical threads.
- Axis and rotor propeller in blue colour.




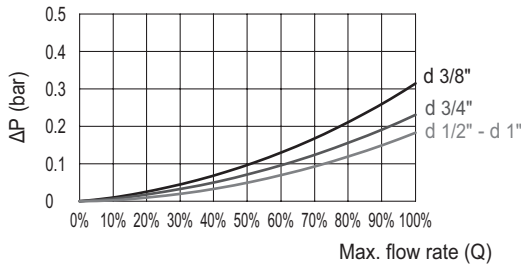

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.


The total measuring range Q_1 indicates the range between the minimum and maximum flow rate value in which the sensor provides a reading.
In the non-linear measurement range Q_2 the inductive sensor provides a signal that cannot be considered accurate since the rotation of the rotor is not constant.
In the linear measuring range Q_3, the pulses provide the measurement with an accuracy of ± 3%.
Both rotor wear and pressure loss increase for flow rates Q_4 higher than the maximum.
The pulses per litre shown in the table represent values measured with water at 20°C and refer to average values tested with different sensors to obtain a more accurate measurement value. Compared to the value measured with water, the linear flow-frequency function can vary by ± 10% depending on the density of the liquid used or its temperature.
It is therefore recommended a specific calibration for each type of liquid used. The repeatability of the measurement is ± 3%, referred to the full scale frequency.

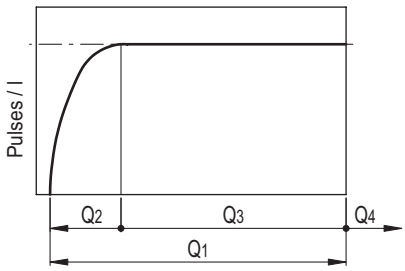

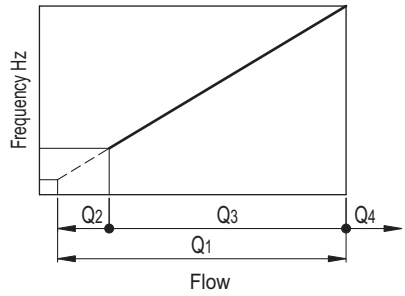

SPECIAL EXECUTIONS ON REQUEST
- AISI 316 stainless steel bosses.


HVF-E (G3/8 - G1/2)

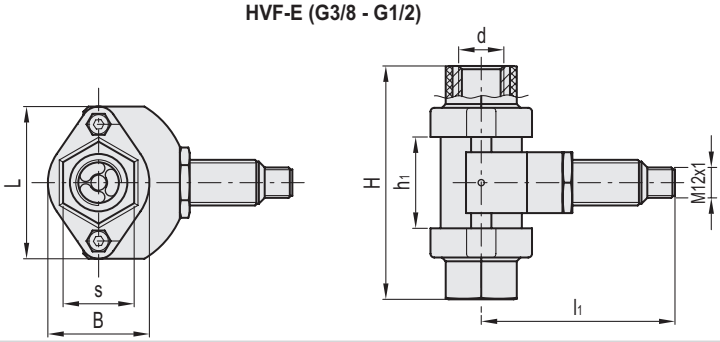

HVF-E (G3/8 - G1/2)

Code	Description	d	H	L	B	h_1	s	l_1	P max # Bar	Q_1* l / min	Q_2** l / min	Q_3*** l / min	Pulses / l	Maximum tightening torque [Nm]	Maximum Frequency Hz	⚖
111313	HVF.92-E-3/8	3/8	92	60	40	36	28	82	10	1.2 ÷ 20	1.2 ÷ 3	3 ÷ 20	136	20	45	308
111315	HVF.92-E-1/2	1/2	92	60	40	36	28	82	10	1.2 ÷ 40	1.2 ÷ 3	3 ÷ 40	128	20	86	230

HVF-E (G3/4 - G1)

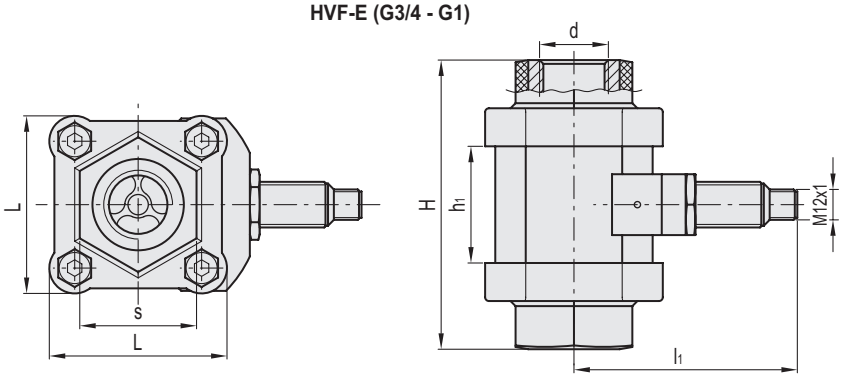

HVF-E (G3/4 - G1)

Code	Description	d	H	L	h_1	s	l_1	P max # Bar	Q_1* l / min	Q_2** l / min	Q_3*** l / min	Pulses / l	Maximum tightening torque [Nm]	Maximum Frequency Hz	⚖
111335	HVF.114-E-3/4	3/4	114	70	46	46	94	10	2.1 ÷ 60	2.1 ÷ 5	5 ÷ 60	30	20	30	750
111343	HVF.114-E-1	1	114	70	46	46	94	10	2.1 ÷ 80	2.1 ÷ 5	5 ÷ 80	35	20	48	650

Maximum pressure* Total measuring range.** Non linear measuring range.*** Linear measuring range.Flow rates Q_1, Q_2 and Q_3 refer to the use of water at 20°.

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.