METRIC | INOX STAINLESS STEEL | RoHS | PA | PA-T | +80° 0°

BASE AND CASE
High-resistance polyamide based (PA) technopolymer.
Black base.
Case in the following colours:
- **C2**: RAL 2004 orange, glossy finish.
- **C3**: RAL 7035 grey, glossy finish.
- **C1**: RAL 7021 grey-black, glossy finish.
- **C55:** RAL 5005 blue colour, glossy finish.

The ultrasonic welding between the base and the case prevents separation and avoids dust penetration.

WINDOW
Transparent polyamide based (PA-T) technopolymer, moulded over the case and with a perfect seal. Resistant to solvents, oils, greases and other chemical agents (avoid contact with alcohol during cleaning operations).

DISPLAY
It indicates the displacement of the mechanism controlled by the spindle from the start position (0).
Three-digit roller counter. The digits of red rolls show the decimal values. The display can be in different positions (see "Table of the possible combinations").
- **AN**: inclined display, counter in upper position.
- **AR**: inclined display, counter in lower position.
- **FN**: front display, counter in upper position.
- **FR**: front display, counter in lower position.

INTERNAL GASKET
O-ring front sealing in NBR synthetic rubber, between the case and the boss.

REAR GASKET
Foam polyethylene, supplied.

STANDARD EXECUTIONS
Boss with Ø 10 mm H7 reamed hole, fitting to shaft by means of a grub screw with hexagon socket and cup end, included in the supply.
- **DD50**: black-oxide steel boss.
- **DD50-SST**: AISI 303 stainless steel boss.

DIRECTION OF ROTATION
- **D**: clockwise. Increasing values with clockwise rotation of the boss.
- **S**: anti-clockwise. Increasing values with anti-clockwise rotation of the boss.


WEIGHT
22 grams.


ERGONOMY AND DESIGN
Compact roller counter, ergonomically designed digits for rapid reading. The readability of the counter is increased by the magnifying window.

ASSEMBLY INSTRUCTIONS
1. Drill a Ø 6 mm by 10 mm hole in the body of the machine with a 18 mm centre distance from the spindle to fit the rear referring pin.
2. Set the spindle to the start or referring position.
3. Fit the indicator with the zeroed roller counter onto the spindle and make sure that the referring pin fit the hole.
4. Clamp the boss to the spindle by tightening the grub screw with hexagon socket and cup end, according to UNI 5929-85.



ELESA Original design

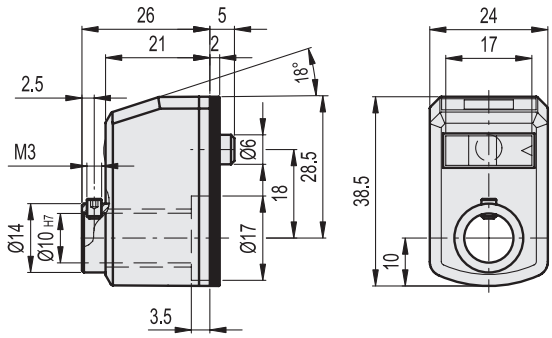



11/2025

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.

SPECIAL EXECUTIONS ON REQUEST


- Special readings after one revolution.
- Case in different colours.
- Completely sealed digital position indicators with IP 67 protection class, see table EN 60529 (on page A-19) obtained by means of a brass bushing with double seal ring inside the rear cavity of the base.

FEATURES AND APPLICATIONS

Direct drive digital position indicators can be assembled on passing through spindles in any position to give direct reading of the positioning of a machine component. They are suitable also for motor driven applications (see "Table of the possible combinations").

ACCESSORIES ON REQUEST *(TO BE ORDERED SEPARATELY)*

- **MDX-50**: polyamide based (PA) technopolymer knob.
- **RB50**: black-oxide steel reduction sleeves.
- **RB50-SST**: AISI 304 stainless steel reduction sleeves.
- **BSA-T50**: shaft locking base in polyamide based (PA) SUPER-technopolymer, black colour, matte finish. BSA-T50 locking bases allow an easy and quick locking of the spindles after their positioning. They are equipped with a Ø 6.1 mm hole to fit the referring pin of the indicator. They can be assembled with the handle either on the right or on the left and can be fitted to the machine by means of two M3 cylindrical-head screws (not included in the supply).



RB50 METRIC

Code	Description	dH7
CE.80940	RB50-6	6
CE.80950	RB50-8	8

RB50-SST INOX STAINLESS STEEL METRIC


Code	Description	dH7
CE.90940	RB50-6-SST	6
CE.90950	RB50-8-SST	8

Example of description for ordering

DD50 - AN - 003 - D - C2 - SST

Series

Display position



AN AR

FN FR

Reading of the counter after one revolution

Increasing numbering



D
clockwise



S
anti-clockwise

Colour

C2
RAL 2004

C3
RAL 7035

C1
RAL 7021

C55
RAL 5005

Stainless steel boss



To add only for the version with stainless steel boss

0 0 3	0 0 3	0 0 3	Pitch	Speed (rpm) *
003	00.3	0.03	0.3	1500
010	01.0	0.10	1.0	1500
020	02.0	0.20	2.0	1250
030	03.0	0.30	3.0	830
040	04.0	0.40	4.0	625
050	05.0	0.50	5.0	500
100	10.0	1.00	10	250

* The maximum rotation speed (rpm) of the spindle reported in the table corresponds to a maximum rotation of 25000 units of the last roll on the right of the counter.
Rotational speed tests have been performed in our laboratory under standard operating conditions. Small misalignments (not compromising the correct reading) of counter digits can occur due to high tolerances between gear teeth, designed to prevent damage from sudden acceleration or stop.

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.

elesa