Adjustable shank handles

Zinc alloy and alluminum

INCH RoHS

STANDARD EXECUTION

Threaded blind holes for mounting from the back.

HANDLE TUBE

Aluminum, wall thickness 1.5 mm
- Powder coated
Black RAL 9005, textured finish **SW**
- Anodized, natural color **EL**
- Anodized, natural color **ES**

HANDLE LEGS

Zinc die casting
Powder coated, textured finish
- Black, RAL 9005 for SW / EL
- Silver, RAL 9006 for ES

COVER

Plastic, light gray

FEATURES AND APPLICATIONS

The handle tube of the GN 333.1 tubular handles can be screwed to the handle bases without further machining or processing, allowing special lengths to be realised easily.
Further handle legs can be added for very long tubular handles. Individual handle legs for tubular handles Ø 28 are available under GN 333.8.



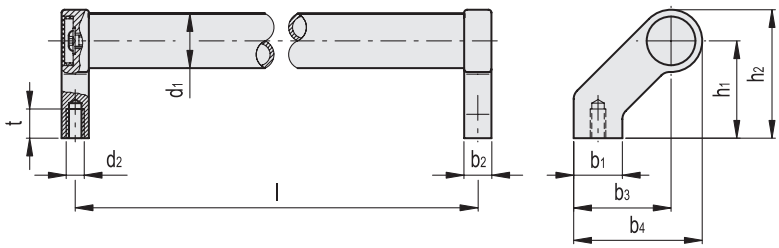

GN 333

INCH

Code	Description	b_1	d_1	l	d_2	b_2	b_3	b_4	h_1	h_2	t_{min}	⚖
GN.92770351	GN 333-0.79-8.00-A-SW	0.94	0.79	8.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.54
GN.92770651	GN 333-0.79-10.00-A-SW	0.94	0.79	10.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.63
GN.92770652	GN 333-0.79-12.00-A-SW	0.94	0.79	12.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.63
GN.92770951	GN 333-0.79-16.00-A-SW	0.94	0.79	16.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.80
GN.92766251	GN 333-1.10-8.00-A-SW	0.98	1.10	8.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	0.91
GN.92766352	GN 333-1.10-10.00-A-SW	0.98	1.10	10.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.00
GN.92766651	GN 333-1.10-12.00-A-SW	0.98	1.10	12.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.00
GN.92766995	GN 333-1.10-16.00-A-SW	0.98	1.10	16.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.17
GN.92767251	GN 333-1.10-20.00-A-SW	0.98	1.10	20.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.25
GN.93336001	GN 333-1.10-24.00-A-SW	0.98	1.10	24.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.28
GN.92769851	GN 333-0.79-7.00-A-EL	0.94	0.79	7.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.53
GN.92770151	GN 333-0.79-8.00-A-EL	0.94	0.79	8.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.54
GN.92771051	GN 333-0.79-10.00-A-EL	0.94	0.79	10.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.62
GN.92770451	GN 333-0.79-12.00-A-EL	0.94	0.79	12.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.61
GN.92770751	GN 333-0.79-16.00-A-EL	0.94	0.79	16.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.70
GN.92766151	GN 333-1.10-8.00-A-EL	0.98	1.10	8.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	0.93
GN.92766356	GN 333-1.10-10.00-A-EL	0.98	1.10	10.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	0.94
GN.92766551	GN 333-1.10-12.00-A-EL	0.98	1.10	12.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.02
GN.92766993	GN 333-1.10-16.00-A-EL	0.98	1.10	16.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.19
GN.92767151	GN 333-1.10-20.00-A-EL	0.98	1.10	20.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.24
GN.93336002	GN 333-1.10-24.00-A-EL	0.98	1.10	24.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.37
GN.92769951	GN 333-0.79-7.00-A-ES	0.94	0.79	7.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.53
GN.92770251	GN 333-0.79-8.00-A-ES	0.94	0.79	8.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.53
GN.92770252	GN 333-0.79-10.00-A-ES	0.94	0.79	10.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.61
GN.92770551	GN 333-0.79-12.00-A-ES	0.94	0.79	12.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.61
GN.92770851	GN 333-0.79-16.00-A-ES	0.94	0.79	16.00	1/4 - 20	0.47	1.65	2.13	1.65	2.13	0.47	0.69
GN.92766351	GN 333-1.10-8.00-A-ES	0.98	1.10	8.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	0.95
GN.92766354	GN 333-1.10-10.00-A-ES	0.98	1.10	10.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	0.97
GN.92766751	GN 333-1.10-12.00-A-ES	0.98	1.10	12.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.02
GN.92766997	GN 333-1.10-16.00-A-ES	0.98	1.10	16.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.19
GN.92767351	GN 333-1.10-20.00-A-ES	0.98	1.10	20.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.24
GN.93336003	GN 333-1.10-24.00-A-ES	0.98	1.10	24.00	5/16 - 18	0.55	1.97	2.60	1.97	2.60	0.59	1.26

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.

Ganter Norm