GN 333.1 | Tubular handles

Zinc alloy and alluminum

INCH

RoHS

STANDARD EXECUTION

Threaded blind holes for mounting from the back.

HANDLE TUBE

Aluminum, wall thickness 1.5 mm

- Powder coated

Black RAL 9005, textured finish **SW**

- Anodized, natural color **EL**
- Anodized, natural color **ES**

HANDLE LEGS

Zinc die casting

Powder coated, textured finish

- Black, RAL 9005 for SW / EL
- Silver, RAL 9006 for ES

COVER

Plastic, light gray

FEATURES AND APPLICATIONS

The handle tube of the GN 333.1 tubular handles can be screwed to the handle bases without further machining or processing, allowing special lengths to be realised easily.

Further handle legs can be added for very long tubular handles. Individual handle legs for tubular handles Ø 28 are available under GN 333.9.



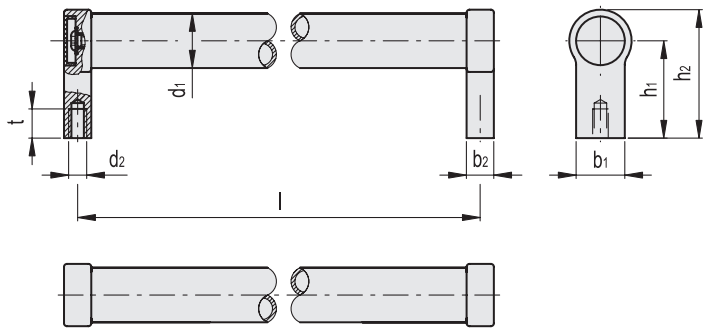

GN 333.1

INCH

Code	Description	b_1	d_1	l	d_2	b_2	h_1	h_2	t_{min}	⚖
GN.92767551	GN 333.1-0.79-8.00-A-SW	0.94	0.79	8.00	1/4 - 20	0.47	1.97	2.60	0.59	0.45
GN.92767552	GN 333.1-0.79-10.00-A-SW	0.94	0.79	10.00	1/4 - 20	0.47	1.97	2.60	0.59	0.46
GN.92767751	GN 333.1-0.79-12.00-A-SW	0.94	0.79	12.00	1/4 - 20	0.47	1.97	2.60	0.59	0.52
GN.92767951	GN 333.1-0.79-16.00-A-SW	0.94	0.79	16.00	1/4 - 20	0.47	1.97	2.60	0.59	0.64
GN.92768251	GN 333.1-1.10-8.00-A-SW	0.98	1.10	8.00	5/16 - 18	0.98	1.97	2.60	0.59	0.75
GN.92768452	GN 333.1-1.10-10.00-A-SW	0.98	1.10	10.00	5/16 - 18	0.98	1.97	2.60	0.59	0.79
GN.92768751	GN 333.1-1.10-12.00-A-SW	0.98	1.10	12.00	5/16 - 18	0.98	1.97	2.60	0.59	0.86
GN.92769052	GN 333.1-1.10-16.00-A-SW	0.98	1.10	16.00	5/16 - 18	0.98	1.97	2.60	0.59	0.97
GN.92769251	GN 333.1-1.10-20.00-A-SW	0.98	1.10	20.00	5/16 - 18	0.98	1.97	2.60	0.59	1.09
GN.92769452	GN 333.1-1.10-24.00-A-SW	0.98	1.10	24.00	5/16 - 18	0.98	1.97	2.60	0.59	1.10
GN.92765651	GN 333.1-0.79-7.00-A-EL	0.94	0.79	7.00	1/4 - 20	0.47	1.97	2.60	0.59	0.42
GN.92767451	GN 333.1-0.79-8.00-A-EL	0.94	0.79	8.00	1/4 - 20	0.47	1.97	2.60	0.59	0.44
GN.92767550	GN 333.1-0.79-10.00-A-EL	0.94	0.79	10.00	1/4 - 20	0.47	1.97	2.60	0.59	0.44
GN.92767651	GN 333.1-0.79-12.00-A-EL	0.94	0.79	12.00	1/4 - 20	0.47	1.97	2.60	0.59	0.52
GN.92767851	GN 333.1-0.79-16.00-A-EL	0.94	0.79	16.00	1/4 - 20	0.47	1.97	2.60	0.59	0.60
GN.92768151	GN 333.1-1.10-8.00-A-EL	0.98	1.10	8.00	5/16 - 18	0.98	1.97	2.60	0.59	0.76
GN.92768450	GN 333.1-1.10-10.00-A-EL	0.98	1.10	10.00	5/16 - 18	0.98	1.97	2.60	0.59	0.79
GN.92768651	GN 333.1-1.10-12.00-A-EL	0.98	1.10	12.00	5/16 - 18	0.98	1.97	2.60	0.59	0.84
GN.92769050	GN 333.1-1.10-16.00-A-EL	0.98	1.10	16.00	5/16 - 18	0.98	1.97	2.60	0.59	0.99
GN.92769151	GN 333.1-1.10-20.00-A-EL	0.98	1.10	20.00	5/16 - 18	0.98	1.97	2.60	0.59	1.05
GN.92769450	GN 333.1-1.10-24.00-A-EL	0.98	1.10	24.00	5/16 - 18	0.98	1.97	2.60	0.59	1.21
GN.92765751	GN 333.1-0.79-7.00-A-ES	0.94	0.79	7.00	1/4 - 20	0.47	1.97	2.60	0.59	0.42
GN.92769551	GN 333.1-0.79-8.00-A-ES	0.94	0.79	8.00	1/4 - 20	0.47	1.97	2.60	0.59	0.43
GN.92769552	GN 333.1-0.79-10.00-A-ES	0.94	0.79	10.00	1/4 - 20	0.47	1.97	2.60	0.59	0.44
GN.92769651	GN 333.1-0.79-12.00-A-ES	0.94	0.79	12.00	1/4 - 20	0.47	1.97	2.60	0.59	0.54
GN.92769751	GN 333.1-0.79-16.00-A-ES	0.94	0.79	16.00	1/4 - 20	0.47	1.97	2.60	0.59	0.64
GN.92768351	GN 333.1-1.10-8.00-A-ES	0.98	1.10	8.00	5/16 - 18	0.98	1.97	2.60	0.59	0.74
GN.92768451	GN 333.1-1.10-10.00-A-ES	0.98	1.10	10.00	5/16 - 18	0.98	1.97	2.60	0.59	0.79
GN.92768851	GN 333.1-1.10-12.00-A-ES	0.98	1.10	12.00	5/16 - 18	0.98	1.97	2.60	0.59	0.86
GN.92769051	GN 333.1-1.10-16.00-A-ES	0.98	1.10	16.00	5/16 - 18	0.98	1.97	2.60	0.59	0.99
GN.92769351	GN 333.1-1.10-20.00-A-ES	0.98	1.10	20.00	5/16 - 18	0.98	1.97	2.60	0.59	1.06
GN.92769451	GN 333.1-1.10-24.00-A-ES	0.98	1.10	24.00	5/16 - 18	0.98	1.97	2.60	0.59	1.10

Models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings and photos.
Ganter Norm