

MATERIAL

Aluminium, epoxy resin coating.

COLOUR

Black, glossy finish.

STANDARD EXECUTIONS

H7 reamed blind hole, fitting to shaft by means of a supplied grub screw with hexagon socket and cup end UNI 5929-85.


- VAL-GXX2: for gravity indicators.
- VAL-PXX2: for positive drive indicators.

Rear flange with internal crown gear wheel in acetal resin based (POM) technopolymer. Black-oxide steel screw and anchor pin.

INDICATOR CHOICE (TO BE ORDERED SEPARATELY)

To choose the indicator see the table below for possible assembly with indicators.

See also "Assembly instructions" for gravity indicators type G (on page 460) or positive drive indicators type P (on page 462).

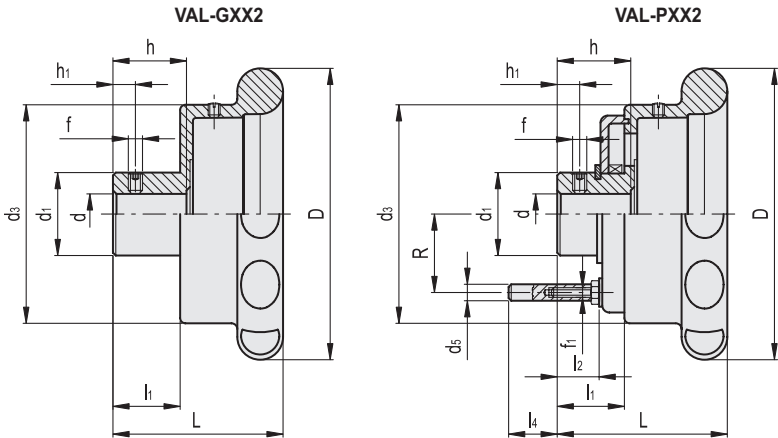

VAL-GXX2

Code	Description	D	L	dh7	h	d1	d3	f	h1	li	Δ	Indicator combinations
CE.28201	VAL.100-GXX2-3/8	102	57.5	3/8"	25	35	78	M6	6.3	21	330	GA02 - GA12 - GW12

VAL-PXX2

Code	Description	D	L	dh7	h	d1	d3	d5	f	f1	h1	l1	l2	l4	R	Δ	Indicator combinations
CE.28202	VAL.100-PXX2-3/8	102	57.5	3/8"	25	30	78	6	M6	M4	6.3	21	13	12.5	28.5	370	PA02 - PA12 - PW12

