



BODY

Brass.



PRISM

Polysulfone.



PACKING RING

NBR.



STANDARD EXECUTIONS

- **HSO**: sensor with DIN 43650 connector in polyamide-based technopolymer (PA), black colour, with built-in cable gland and contact holder. IP65 protection class as shown in table EN 60529 xxx).
- **HSO-KN**: sensor with M12x1 connector, 4-pin with thread in polyamide-based technopolymer (PA), black colour, matte finish. IP67 protection class.

For correct installation see Warnings



FLUID OPERATING TEMPERATURE (NOT FROZEN)

-30 / +110°C.



AMBIENT TEMPERATURE

-30 / +55°C.



MAXIMUM WORKING PRESSURE

100 bar



FEATURES AND APPLICATIONS

Suitable for the detection of translucent liquids inside even small tanks. The optical sensor inserted inside the metal body includes a prism with an infrared diode and a detector device.



SPECIAL EXECUTIONS ON REQUEST

- AISI 316 stainless steel body.
- NPT threadings.



CONNECTOR ASSEMBLY INSTRUCTIONS

1. Remove the connector from the sensor by unscrewing the set screw placed on the connector, take the contact holders out and loosen the cable gland.
2. Insert the cable into the connector (standard connector) and connect the wires to the clamps, as indicated in the wiring instructions.
3. Assemble by pressing the contact holder into the connector in the required position.
4. Screw the connector to the sensor and then tighten the cable gland.



FUNCTIONING AND MAINTENANCE


In the absence of contact with the liquid, the infrared ray is entirely reflected by the prism towards the receiver; however, when the sensor comes into contact with the liquid, the refractive index of the prism changes and part of the infrared ray is dispersed in the liquid itself, causing the output to switch (Fig.1).

The amount of reflected light translates into a measurement of the level inside the tank.

It is advisable to periodically check the condition of the optical sensor lens and, if necessary, proceed with cleaning using non-corrosive liquids.

WARNINGS


- Minimum detectable liquid level: 10 cm.
- The sensor can be mounted both vertically and horizontally (Fig.1).
- In vertical mounting there is the possibility of distortion in the level detection due to the presence of residual drops on the surface of the prism.



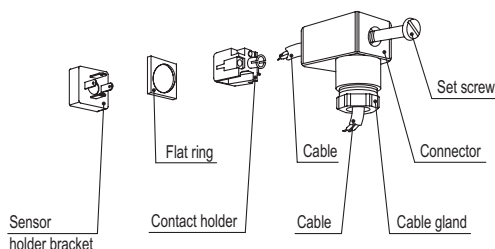


Electrical features

Description	Features
Power supply	15 – 35 Vcc
Current drawn by the internal circuit	10 mA
Max load	100 mA
Electrical output	Push - Pull

Fig.1

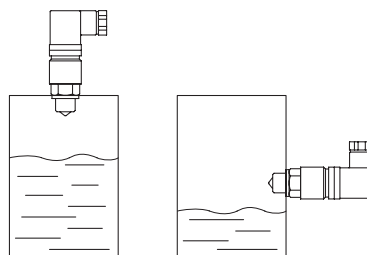

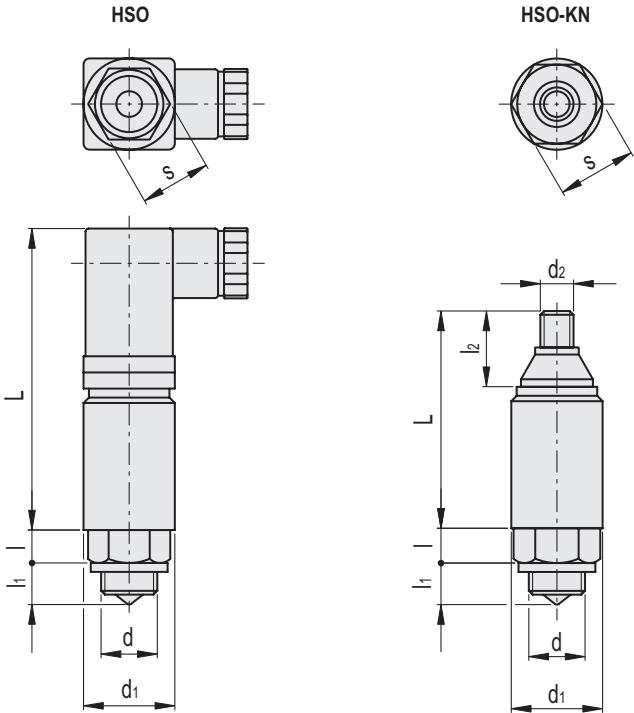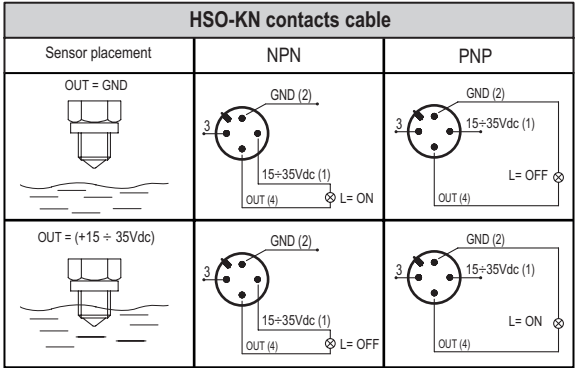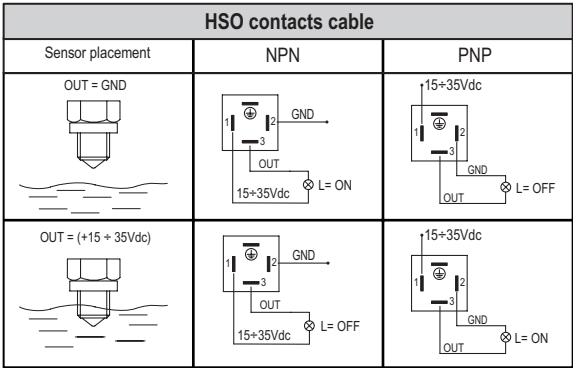

HSO

Code	Description	d	L	l	l1	s	d1	⚖
111262	HSO-G3/8	G 3/8	70	9	14.3	24	29	135
111261	HSO-G1/2	G 1/2	70	9	14.3	24	29	135

HSO-KN

Code	Description	d2	d	L	l	l1	l2	s	d1	⚖
111266	HSO-G3/8-KN	M12x1	G 3/8	57	9	14.3	23	24	29	130
111265	HSO-G1/2-KN	M12x1	G 1/2	57	9	14.3	23	24	29	130

